

SPECIFICATION


Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

MATERIAL


Insulator:Hi-Temp. Thermoplastic, UL94V-0 , Black
 Contact Pin:Copper Alloy



Cap	L	W	H1(Ref.)
>4Pin	7.5	7.7	1.0
≤4Pin	5.2	6.5	1.0

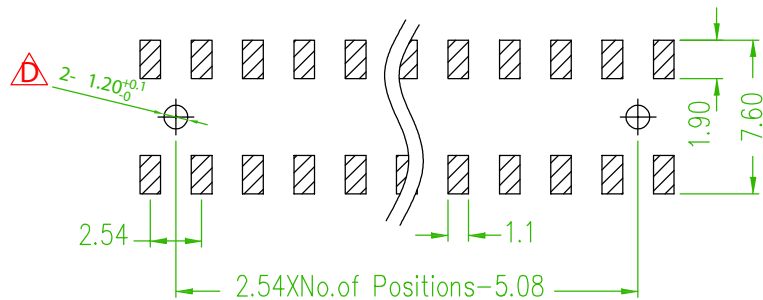

Recommended PCB Layout
 (PCB TOLERANCE ±0.05) △ △

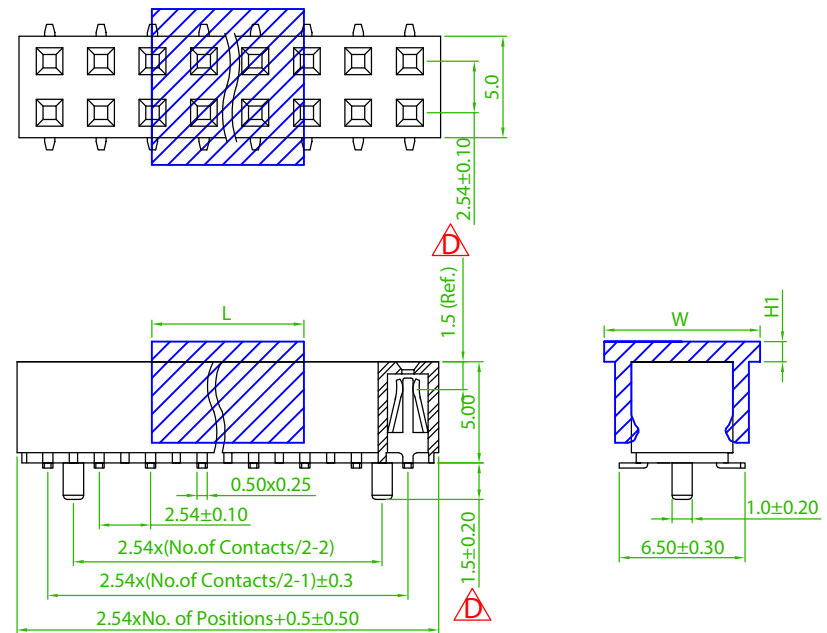

	品名 TITLE	FEMALE HEADER 2.54mm D/R V/T SMT TYPE			頁數 Page	1/1
	品號 PART NO.	14901FL2120xx-12			繪圖 DRAWN	Gary 2017/06/09
	圖號 DRAWING NO.	GN016-GA428	版本 REV.	D	核對 CHECKED	Josh 2019/01/28
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/28
	公差 TOLERANCE	X ±0.38 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	

△ x4	ECN NO.:210807 Revise the Drawing	Benson	2021/08/31
△ x1	Add the Recommended Mating Part	Eric	2019/01/28
△ x1	Revise the PCB Layout	Mia	2018/02/02
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE