


SACC M12 8-pole connectors for assembly



General information


Old:

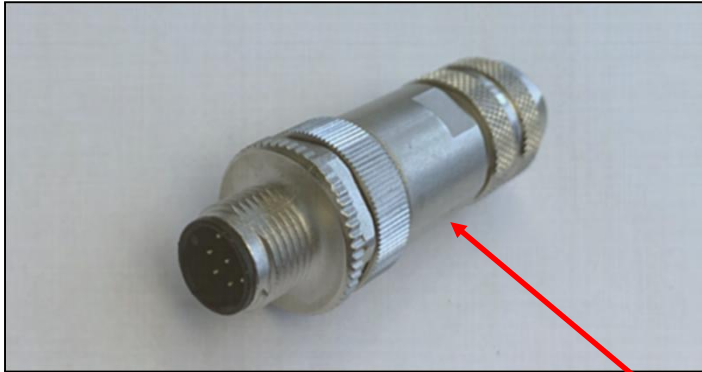

New:



§ Metal housing components change from zinc die-cast to brass

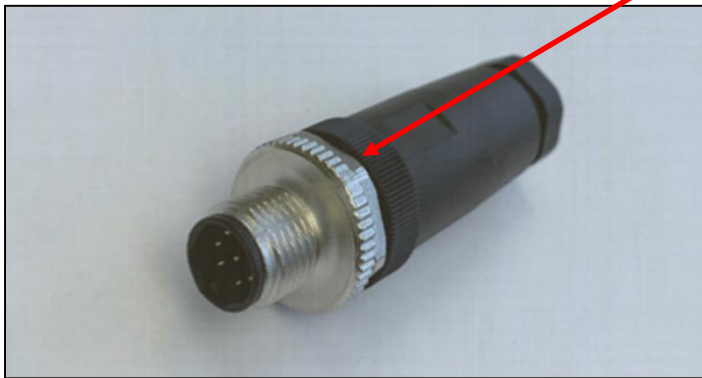

Stripping length

Old:



- § Cable: 35 mm
- § Shorten the shielded to 6 mm
- § Strip the wire: 5 mm

New:



- § Cable: 45 mm
- § Shorten the shielded to 9 mm
- § Strip the wire: 5 mm

Stripping length

Old:



- § Cable: 20 mm
- § Strip the wire: 5 mm


New:




- § Cable: 20 mm
- § Strip the wire: 5 mm

Width flat – shielded male connectors

Old:

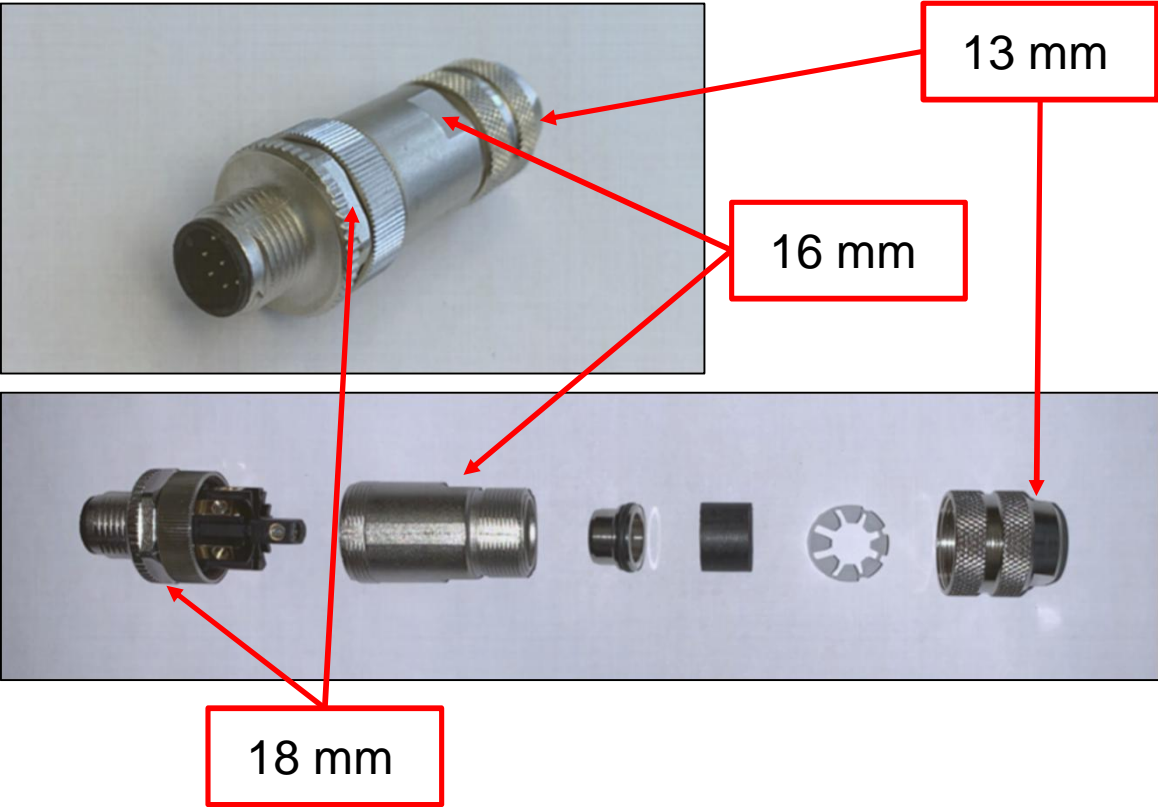


New:

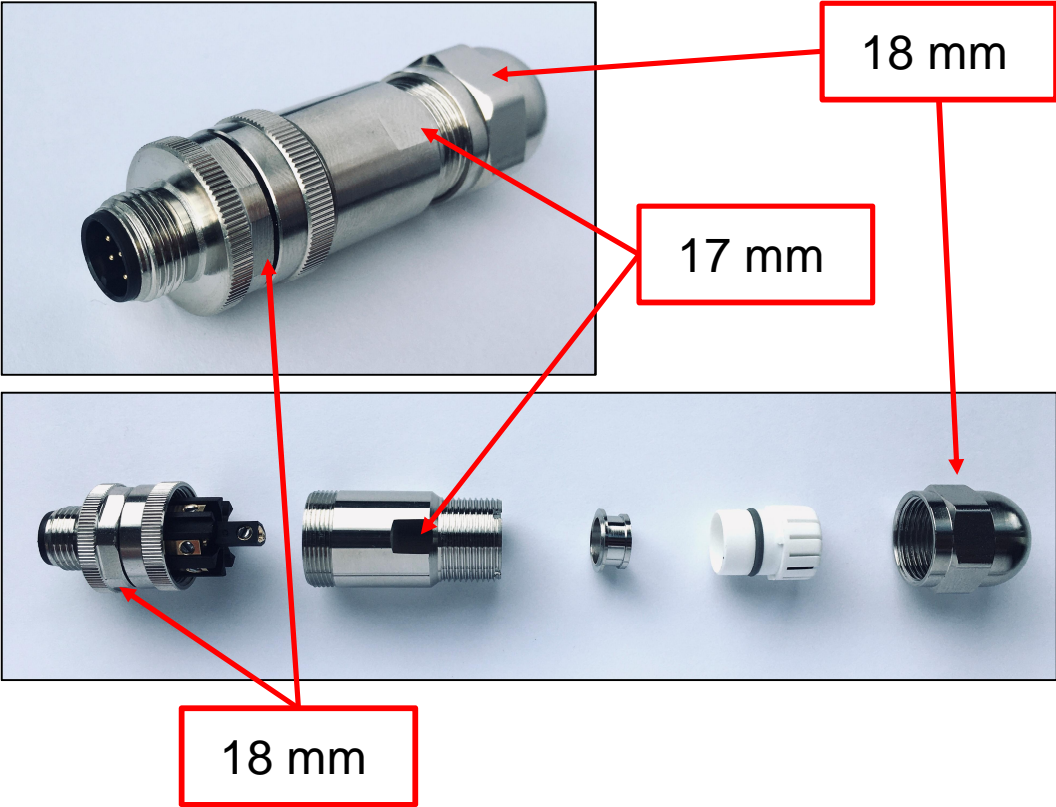


Width flat – shielded female connectors

Old:

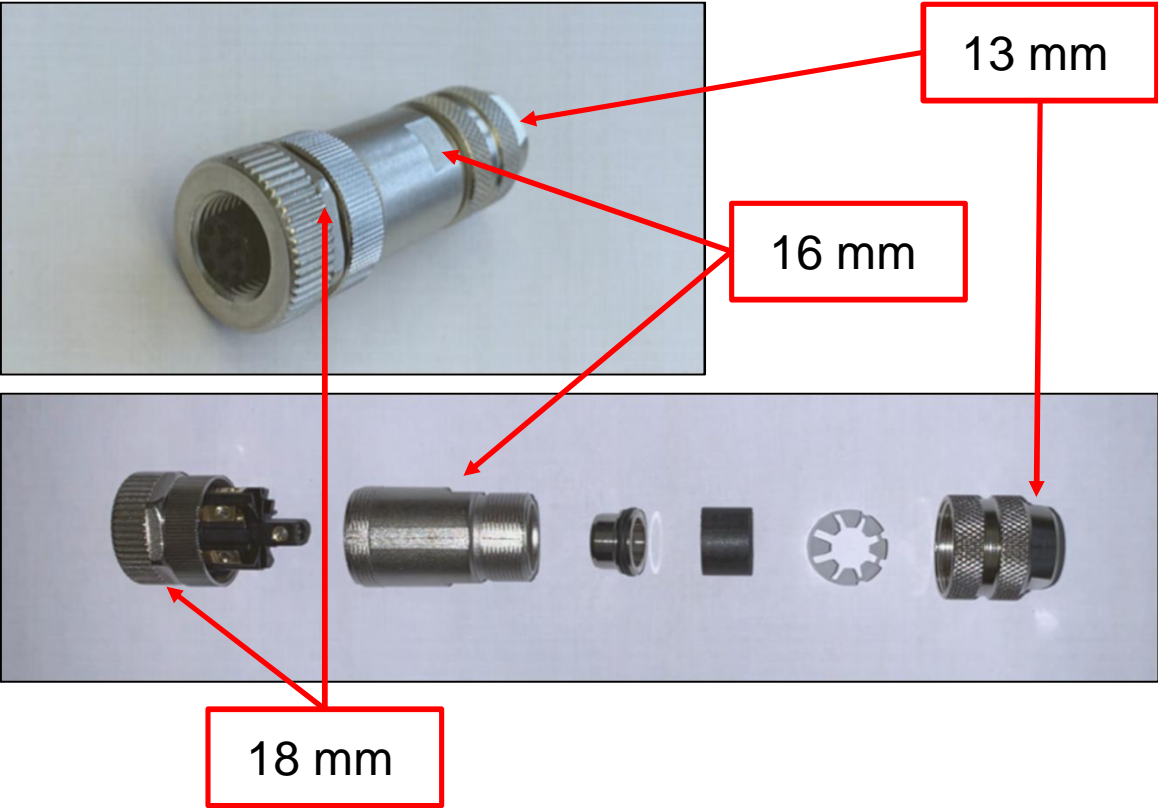

New:

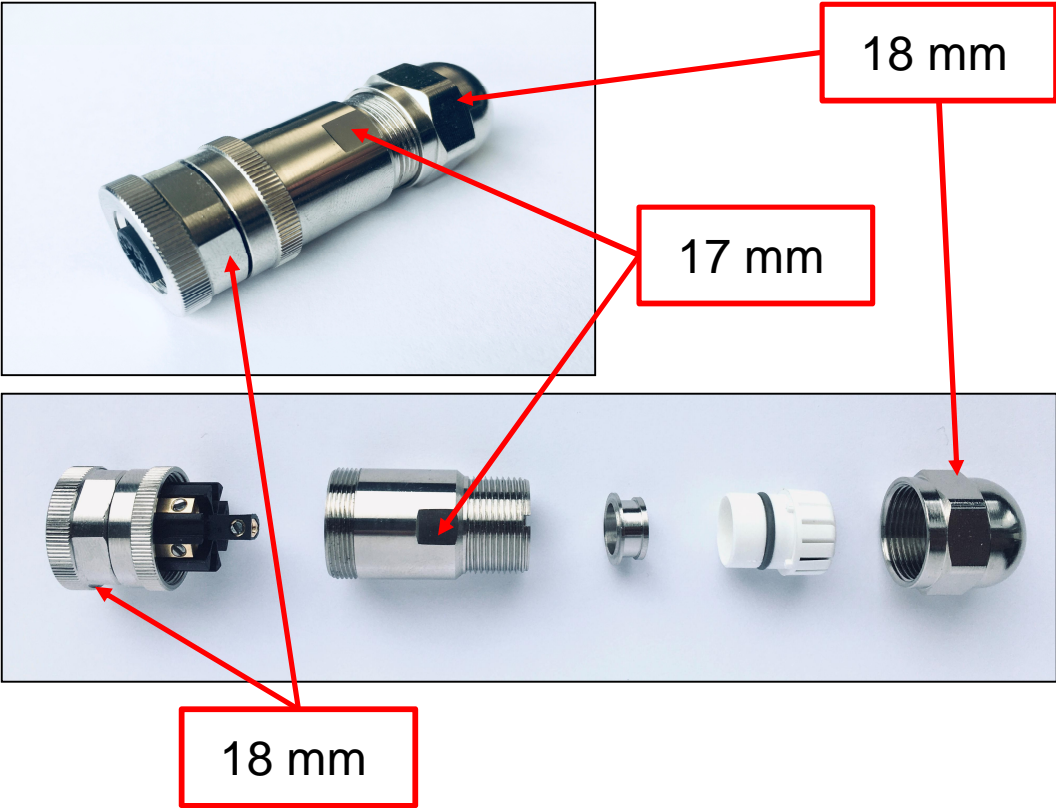

Product change notification – CBF190155 – SACC M12 8-pole connectors for assembly


Width flat – unshielded male connectors

Old:




PG 9: 16 mm
PG11: 19 mm

PG 9: 17 mm
PG11: 18 mm

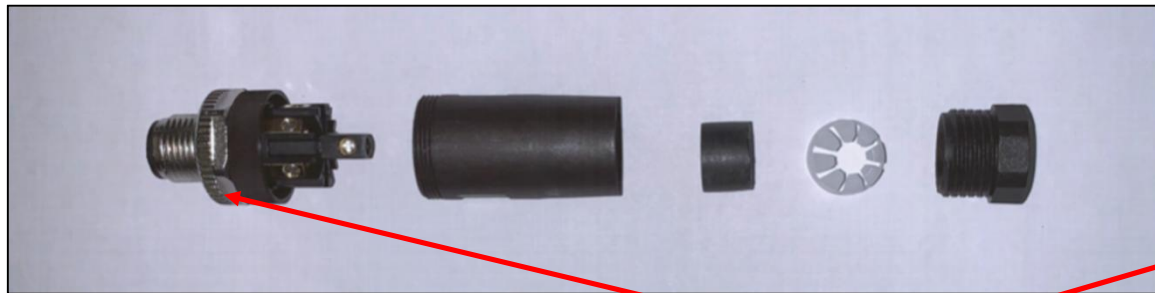

18 mm

New:

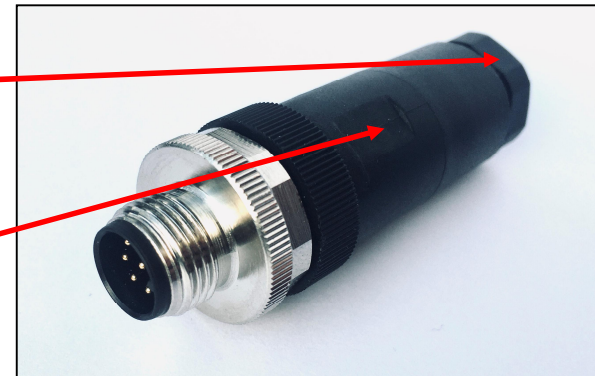

Product change notification – CBF190155 – SACC M12 8-pole connectors for assembly


Width flat – unshielded female connectors

Old:





PG 9: 16 mm
PG11: 19 mm

PG 9: 17 mm
PG11: 18 mm

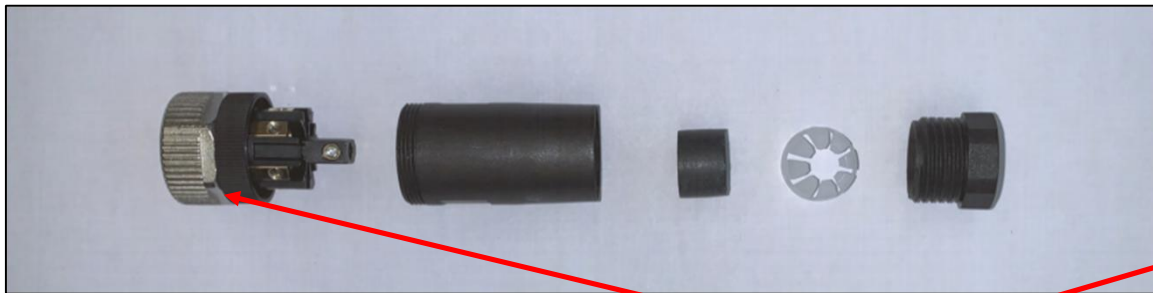

18 mm

New:

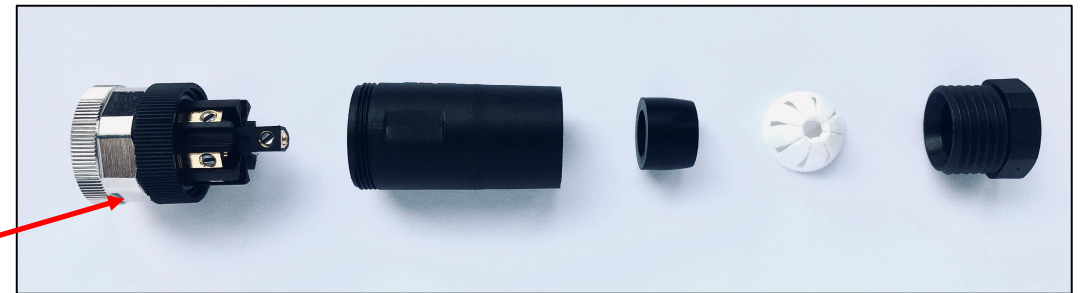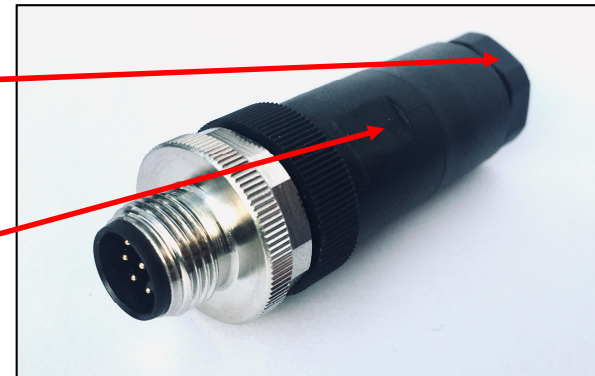


Product change notification – CBF190155 – SACC M12 8-pole connectors for assembly

Design shielded male connector

Old:



New:

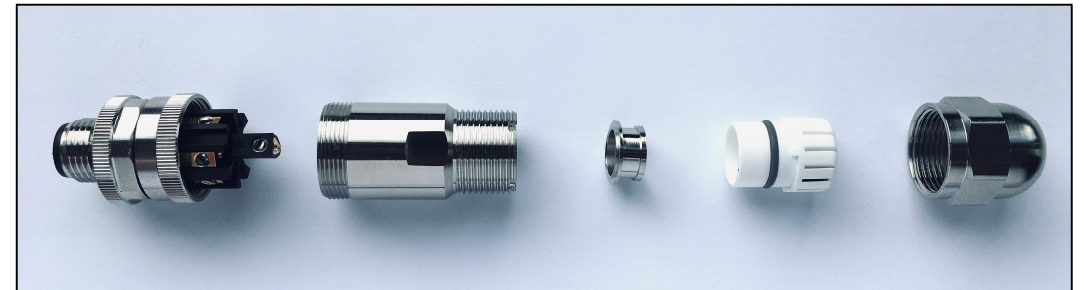


Product change notification – CBF190155 – SACC M12 8-pole connectors for assembly

Design shielded female connector

Old:




New:

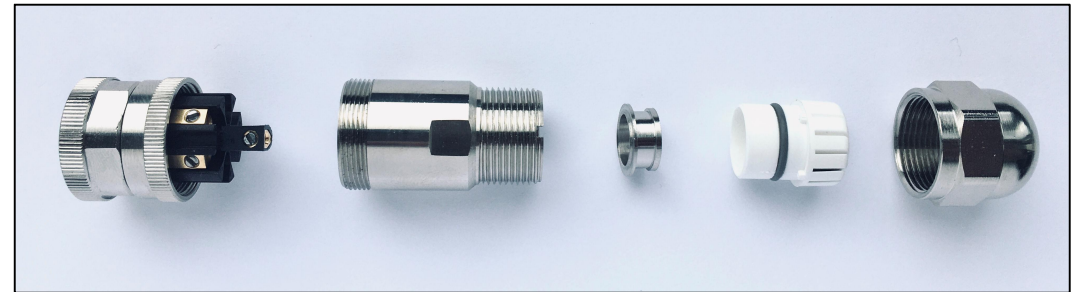


Product change notification – CBF190155 – SACC M12 8-pole connectors for assembly

Design unshielded male connector

Old:

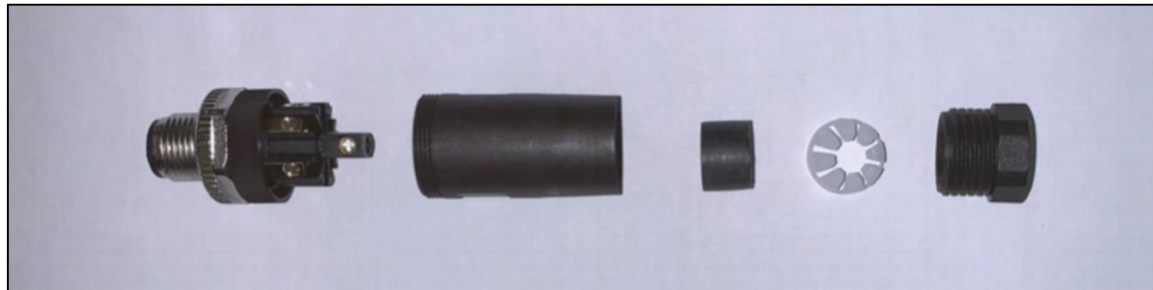


New:

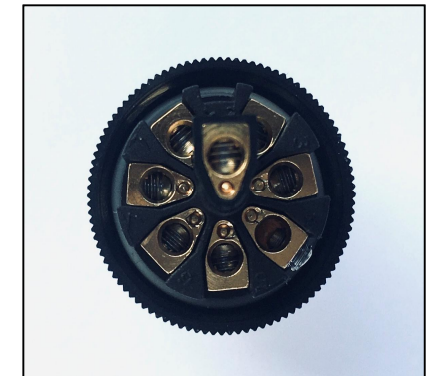

Product change notification – CBF190155 – SACC M12 8-pole connectors for assembly

Design unshielded female connector

Old:

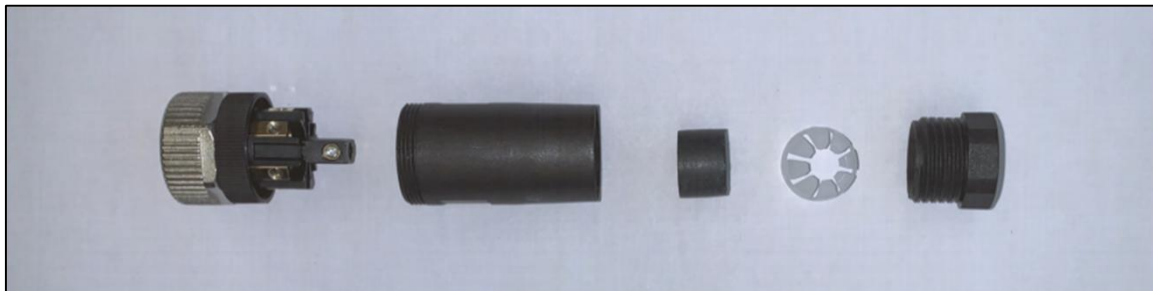

New:

